



Part No: **GF0573**

Date: 9/20/2006

Unit: mm

Description: **speaker**

Page No: 1 of 2




Specifications

| | | |
|----------------------|--------------------------------------|---|
| Nominal Size | 57 mm (2.25 in) | (See attached drawing) |
| Impedance | 8 Ohm \pm 15% | at 800 Hz 1 V |
| Resonant frequency | 450 Hz \pm 90 Hz | at 1 V |
| Sound pressure level | 92 dB/w \pm 3 dB | 1 w 50 cm ave. at 1.0K, 1.4K, 1.7K, 2.0K Hz |
| Response | Fo Hz ~ 21 KHz max 10 dB | |
| Input power | Nominal 3 W | Handling capacity 5 W |
| Operation | must be normal at program source 3 W | |
| Buzz, rattle, etc. | must be normal at sine wave 4.89 V | |
| Magnet | Size: 45 x 22 x 8 mm | |
| Load test | White noise 3 W | for 48 hours |
| Heat test | 70 \pm 2° C | 20-50% R.H. 48 hours |
| Humidity test | 40 \pm 2° C | 90-95% R.H. 48 hours |




Frequency Response Curve

| | |
|-----------------------|------------|
| Potentiometer range | 50 dB |
| Rectifier | RMS |
| Lower limit frequency | 20 Hz |
| Wr. speed | 100 mm/sec |

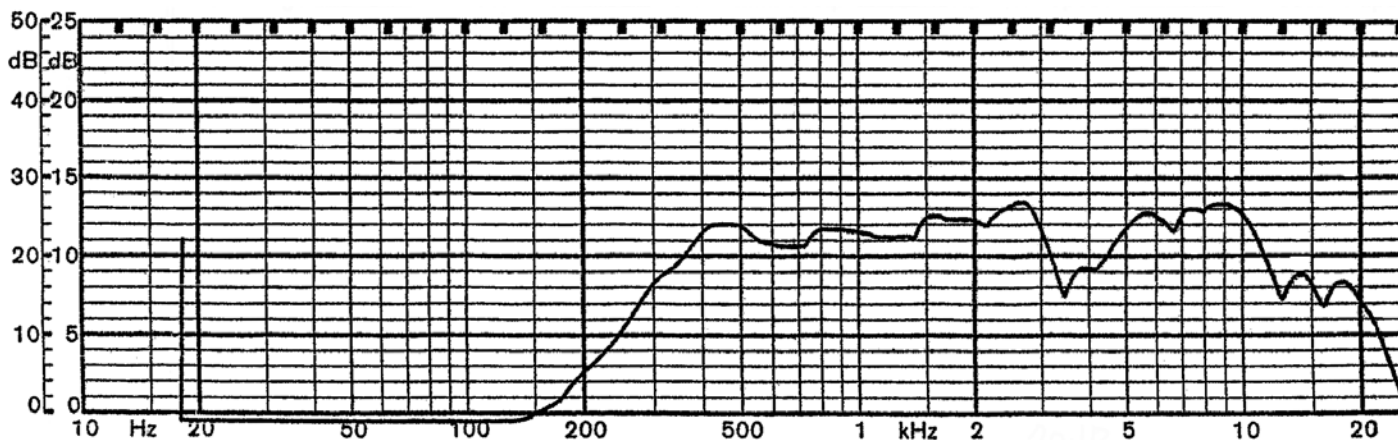

Zero level 70 dB

| | | |
|------|-------------|----------|
| REV. | DESCRIPTION | DATE |
| A | NEW DRAWING | 8/8/2006 |

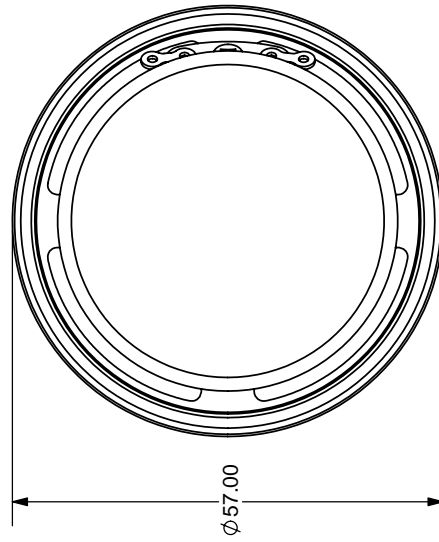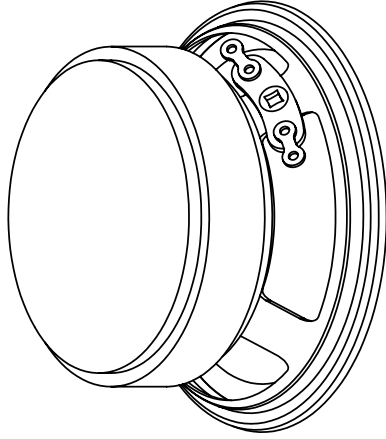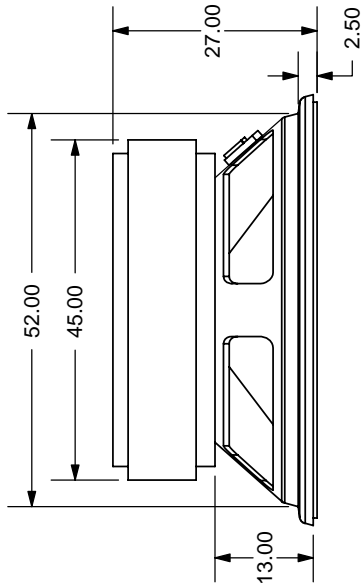

TOLERANCE:
#0.3mm UNLESS OTHERWISE
SPECIFIED



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

| | |
|--|--------------------|
| TITLE: Round frame paper cone - ferrite magnet | REV: A |
| PART NO: GF0573 | UNITS: MM [INCHES] |
| DRAWN BY: ZRJ | APPROVED BY: |
| | SCALE: 1:1 |