

**date** 08/05/2022

page 1 of 3

# MODEL: GF2001 | DESCRIPTION: SPEAKER

#### **FEATURES**

- 205 mm
- round frame
- 10.0 W
- ·8Ω
- ferrite magnet
- paper cone






## **SPECIFICATIONS**


	min	typ	max	units
		10	20	W
at 0.2 kHz, 1.0 V	6.8	8	9.2	Ω
at 1.0 V	75	90	105	Hz
	Fo		11,000	Hz
at 1.0 W, 50 cm, avg at 0.2, 0.3, 0.4, 0.5 kHz	96	98	100	dB
must be normal at sine wave			8.9	V
Ø205.5 x 70				mm
ferrite				
paper				
solder eyelets				
	-25		70	°C
for maximum 5 seconds	400	420	440	°C
yes				
	at 1.0 V  at 1.0 W, 50 cm, avg at 0.2, 0.3, 0.4, 0.5 kHz  must be normal at sine wave  Ø205.5 x 70  ferrite  paper  solder eyelets  for maximum 5 seconds	at 1.0 V 75 F0 at 1.0 W, 50 cm, avg at 0.2, 0.3, 0.4, 0.5 kHz 96 must be normal at sine wave Ø205.5 x 70 ferrite paper solder eyelets -25 for maximum 5 seconds 400	at 0.2 kHz, 1.0 V       6.8       8         at 1.0 V       75       90         Fo         at 1.0 W, 50 cm, avg at 0.2, 0.3, 0.4, 0.5 kHz       96       98         must be normal at sine wave       9205.5 x 70       50       50         ferrite       50       50       50       60       70       60       60       70 </td <td>at 0.2 kHz, 1.0 V       6.8       8       9.2         at 1.0 V       75       90       105         Fo       11,000         at 1.0 W, 50 cm, avg at 0.2, 0.3, 0.4, 0.5 kHz       96       98       100         must be normal at sine wave       8.9         Ø205.5 x 70       -       -       -         ferrite       paper       -25       70         for maximum 5 seconds       400       420       440</td>	at 0.2 kHz, 1.0 V       6.8       8       9.2         at 1.0 V       75       90       105         Fo       11,000         at 1.0 W, 50 cm, avg at 0.2, 0.3, 0.4, 0.5 kHz       96       98       100         must be normal at sine wave       8.9         Ø205.5 x 70       -       -       -         ferrite       paper       -25       70         for maximum 5 seconds       400       420       440

# **MECHANICAL DRAWING**

units: mm


tolerance: ±0.8 mm

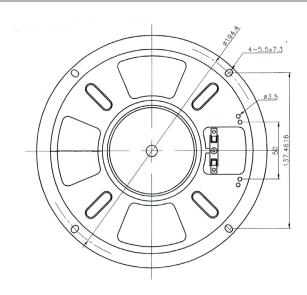

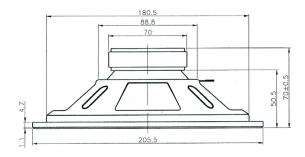

## FREQUENCY RESPONSE CURVE

parameter	conditions/description
potentiometer range	50 dB
rectifier	RMS
lower limit frequency	20 Hz
wr. speed	100 mm/sec
zero level	60 dB

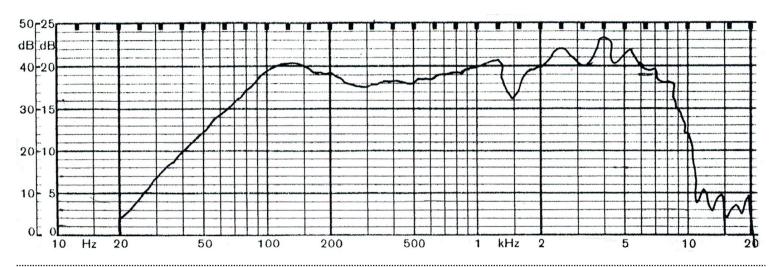

### **REVISION HISTORY**

rev.	description	date	
1.0	initial release	01/20/2003	
1.01	brand update	03/09/2021	
1.02	logo, datasheet style update	08/05/2022	

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.