REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/11/2006
B	housing updated	9/8/2010
C	added TR packaging option	11/7/2012

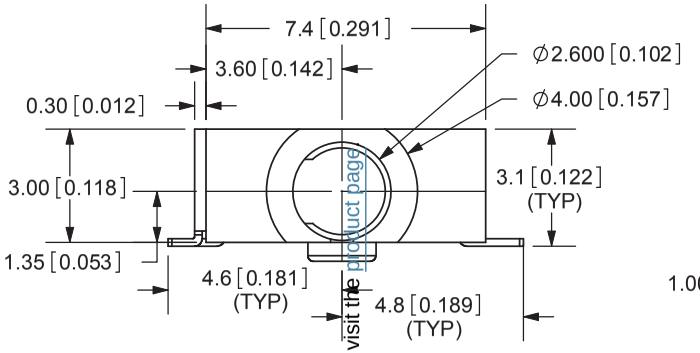

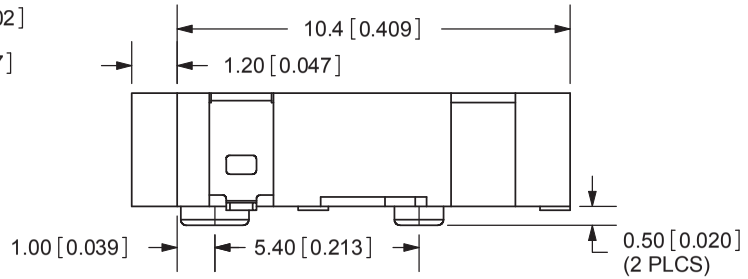

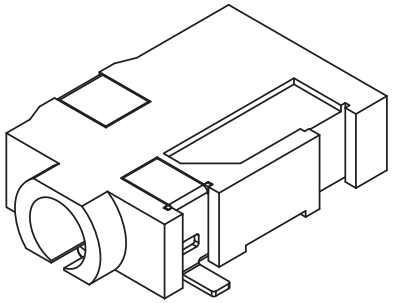

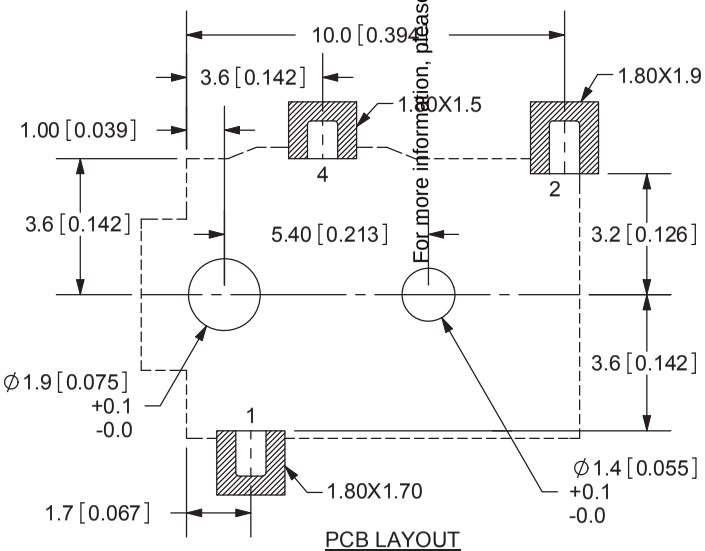

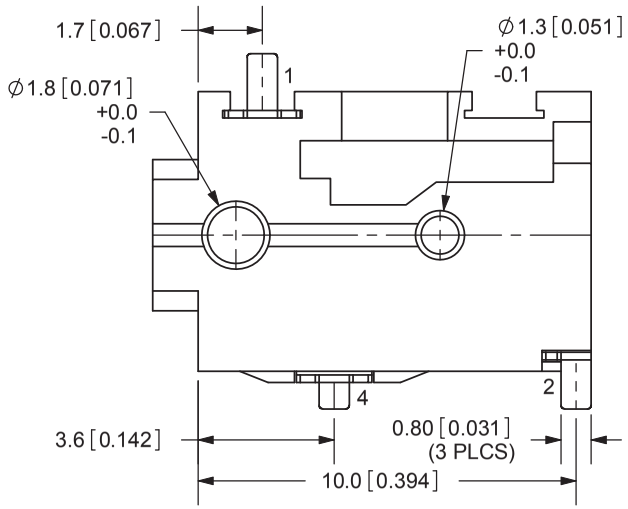

Note:
Add suffix "-TR" to the model number for tape & reel packaging

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

RoHS

MODEL NO.	MJ1-2533-SMT
SCHEMATIC	

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

	MATERIAL	PLATING
TERMINAL 1	Copper Alloy	Gold
TERMINAL 2	Copper Alloy	Gold
TERMINAL 4	Brass	Gold
BODY	PA6T	

CUI INC
20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE: 2.5mm SURFACE MOUNT MONO JACK	REV: C
PART NO. MJ1-2533-SMT	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 5:1

PC FILE NAME: MJ1-2533-SMT

COPYRIGHT 2012 BY CUI INC.

For more information, please visit the product page