

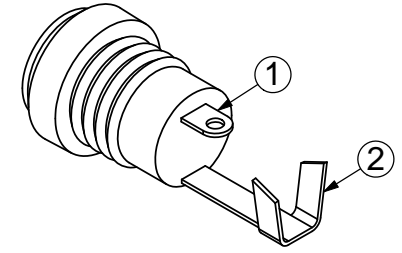
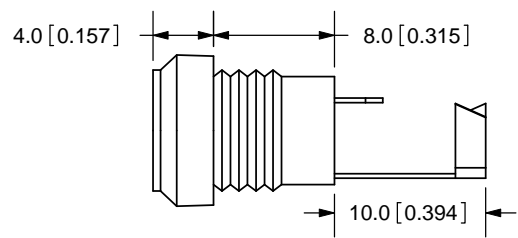




| REV. | DESCRIPTION | DATE |
|------|--------------------------|-----------|
| B | Updated rating | 3/6/2007 |
| C | added contact resistance | 8/20/2010 |
| D | added pin designations | 9/10/2010 |

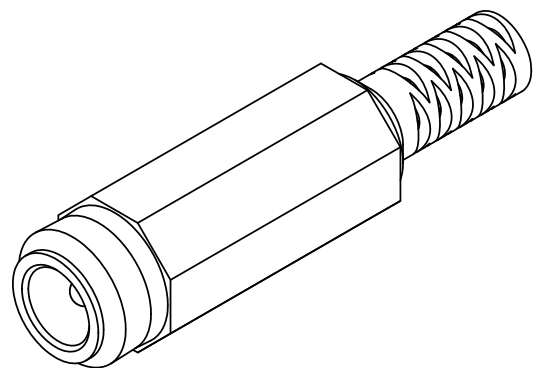

TOLERANCE:
±0.3mm

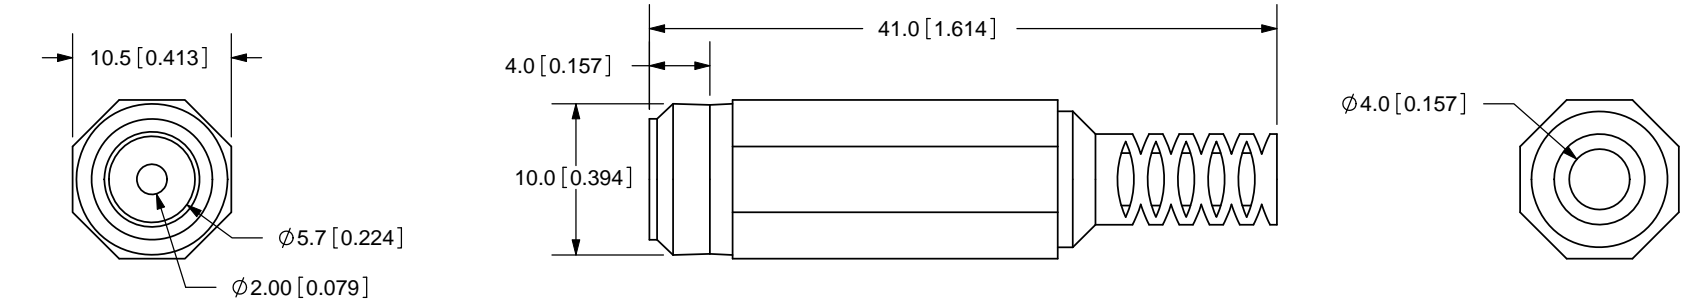

SPECIFICATIONS:
 RATING: 24V DC @ 4A
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES

| | |
|-----------|---|
| MODEL NO. | PR-002A |
| SCHEMATIC |  1 |
| |  2 |

CENTER PIN DIAMETER 2.0mm Dia.

| | MATERIAL | PLATING |
|-------------|----------|---------|
| CONTACT PIN | PBS | Nickel |
| CAP | PE | |
| TERMINAL 1 | BSR | Nickel |
| TERMINAL 2 | BSR | Nickel |
| PIN | BSBM | Nickel |
| RING | BSBM | Nickel |
| BODY | PA | |



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

| | | |
|-----------------------|--------------------|------------|
| TITLE: DC POWER PLUGS | | REV: D |
| PART NO. PR-002A | UNITS: MM [INCHES] | |
| DRAWN BY: ZRJ | APPROVED BY: | SCALE: 2:1 |

PC FILE NAME:
PR-002A

COPYRIGHT 2010 BY CUI INC.