

SERIES: VBSD0.25-SIP | **DESCRIPTION:** DC-DC CONVERTER


FEATURES

- 0.25 W isolated output
- industry standard 4 pin SIP package
- single unregulated outputs
- -40~85°C temperature range
- 1,000 Vdc isolation
- no heatsink required



MODEL	input voltage		output voltage	output current		output power	ripple and noise	efficiency
	typ (Vdc)	range (Vdc)	(Vdc)	min (mA)	max (mA)	max (W)	max (mVp-p)	typ (%)
VBSD0.25-S3.3-S3.3-SIP	3.3	3.0 ~ 3.6	3.3	5	76	0.25	100	64
VBSD0.25-S3.3-S5-SIP	3.3	2.97 ~ 3.63	5	5	50	0.25	100	64
VBSD0.25-S5-S3.3-SIP	5	4.5 ~ 5.5	3.3	8	76	0.25	100	64
VBSD0.25-S5-S5-SIP	5	4.5 ~ 5.5	5	5	50	0.25	100	64
VBSD0.25-S5-S9-SIP	5	4.5 ~ 5.5	9	3	28	0.25	100	65
VBSD0.25-S5-S12-SIP	5	4.5 ~ 5.5	12	2	21	0.25	100	67
VBSD0.25-S5-S15-SIP	5	4.5 ~ 5.5	15	2	17	0.25	100	65
VBSD0.25-S12-S3.3-SIP	12	10.8 ~ 13.2	3.3	8	76	0.25	100	64
VBSD0.25-S12-S5-SIP	12	10.8 ~ 13.2	5	5	50	0.25	100	65
VBSD0.25-S12-S9-SIP	12	10.8 ~ 13.2	9	3	28	0.25	100	66
VBSD0.25-S12-S12-SIP	12	10.8 ~ 13.2	12	2	21	0.25	100	67
VBSD0.25-S12-S15-SIP	12	10.8 ~ 13.2	15	2	17	0.25	100	66
VBSD0.25-S24-S5-SIP	24	21.6 ~ 26.4	5	5	50	0.25	100	63
VBSD0.25-S24-S12-SIP	24	21.6 ~ 26.4	12	2	21	0.25	100	65
VBSD0.25-S24-S15-SIP	24	21.6 ~ 26.4	15	2	17	0.25	100	66

Notes: 1. All specifications measured at TA=25°C, humidity <75%, nominal input voltage and rated output load unless otherwise specified.

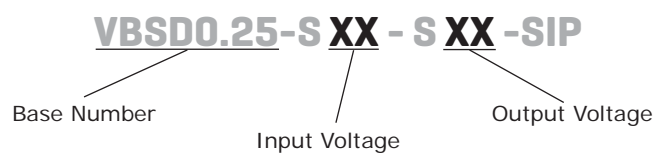PART NUMBER KEY


INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	3.3 V model	2.97	3.3	3.63	Vdc
	5 V model	4.5	5	5.5	Vdc
	12 V model	10.8	12	13.2	Vdc
	24 V model	21.6	24	26.4	Vdc

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation	for Vin change of 1%	3.3 V model		±1.5	%
		all other models		±1.2	%
load regulation	measured from 10% to full load	3.3 V model	15	20	%
		5 V model	12.8	15	%
		9 V model	8.3	15	%
		12 V model	6.8	15	%
		15 V model	6.3	15	%
voltage accuracy	see tolerance envelope graph				
output ripple	20 MHz bandwidth		50	100	mVp-p
switching frequency	100% load, input voltage range		110		kHz
temperature coefficient				±0.03	%/°C

PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection				1	s
over temperature and over voltage protection	linear voltage regulator with overheat protection is connected to the input or output end in series for OTP and OVP				


SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	tested for 1 minute	1,000			Vdc
insulation resistance	at 500 Vdc	1,000			MΩ
RoHS compliant	yes				
MTBF		3,500,000			hours

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
case operating temperature		-40		85	°C
storage temperature		-55		125	°C
storage humidity	non-condensing			95	%
temperature rise	100% load		15	25	°C
lead temperature	1.5 mm from the case for 10 seconds			300	°C

DERATING CURVES

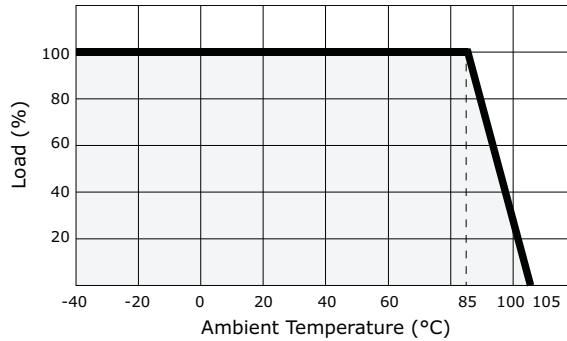


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	0.461 x 0.374 x 0.2.36 (11.70 x 9.50 x 6.00 mm)				inch
case material	plastic UL94-V0				
weight			2.1		g

MECHANICAL DRAWING

Units: mm
 All pins on a 2.54mm pitch
 All pin diameters are 1.0mm

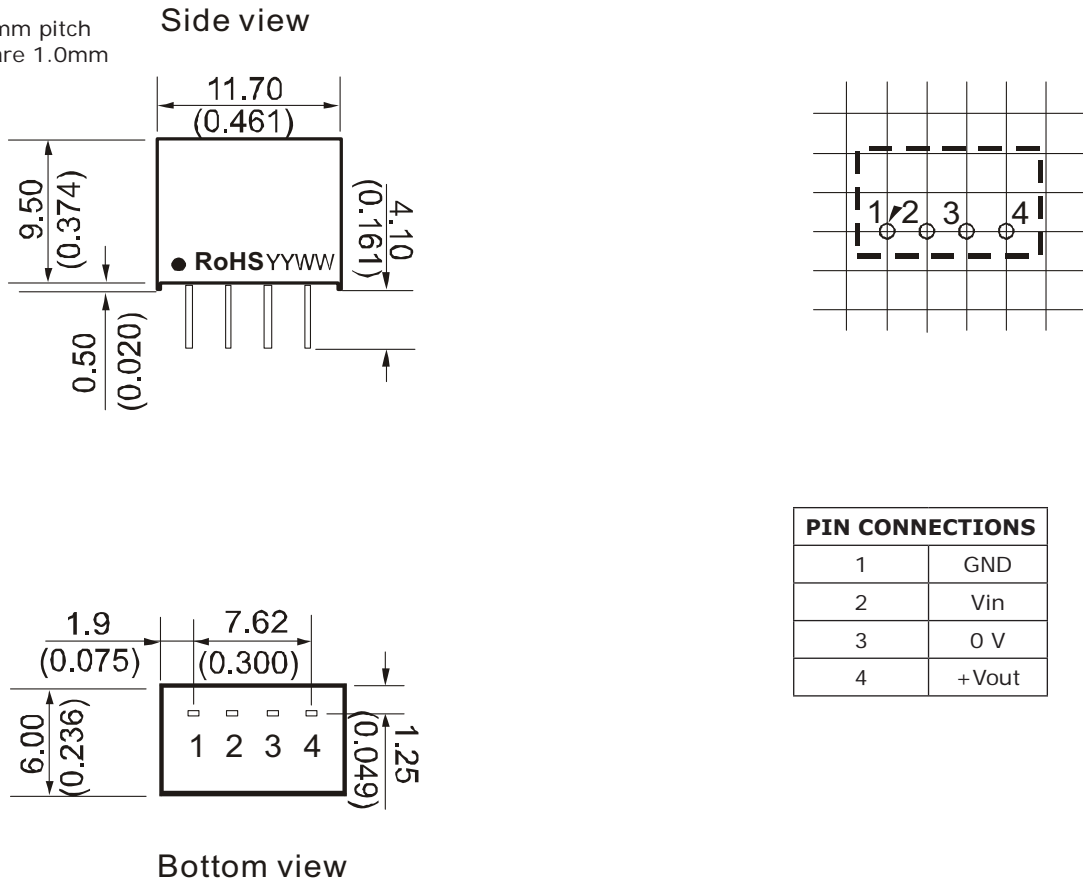

APPLICATION NOTES

1. Requirement on Output Load


In order to ensure the product operates efficiently and reliably, make sure the specified range of input voltage is not exceeded and the minimum output load is not less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading.

2. Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.


3. Filtering

In some circuits which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees the external capacitor table. To get an extremely low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, which may produce a more significant filtering effect. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (Figure 1).

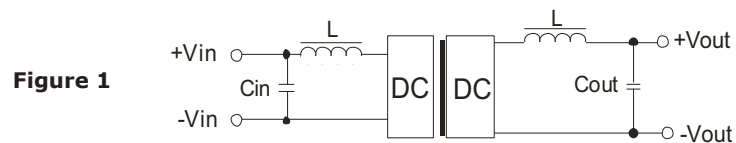

4. Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

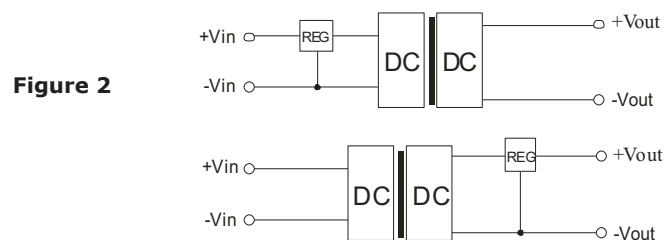

REVISION HISTORY

rev.	description	date
1.0	initial release	06/01/2008
1.01	new template applied	03/05/2012
1.02	V-Infinity branding removed, VBSD0.25-S24-S9-SIP discontinued	08/06/2012
1.03	picture updated	09/06/2012

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.