
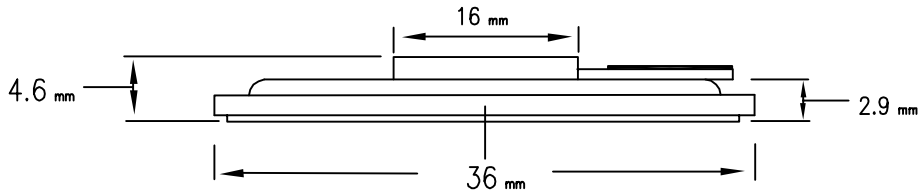



CUI INC
9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

Specifications

| | | | | | |
|----|--------------------|----------------------------------|--------------|--------------------------|------------------------|
| 1 | Part No. | GC0362MA | | | |
| 2 | Nominal Size | 36 mm. | inch | | |
| 3 | Impedance | $8 \Omega \pm 15\%$ | at | 1.5K Hz. | 1 V. |
| 4 | Resonance | 520 Hz.± | 104 Hz. | F0 Hz. | 1 V. |
| 5 | S.P. Level | 82 dB/w± | 3 dB | 0.3 w. 50 cm. average at | |
| 6 | Response | fo Hz.~ | 6K Hz. | MAX 10dB | 1K, 1.2K, 1.5K, 2K Hz. |
| 7 | Crossover Freq. | Hz. | Hz. | dB/OCT | Net work |
| 8 | Input Power | Nominal Input | 0.3 w. | Handling Capacity | 0.5 w. |
| 9 | Operation | Must be normal at program source | | | 0.3 w. |
| 10 | Buzz, Rattle, etc. | Must be normal at sine wave | | | 4.4 v. |
| 11 | Flux Density | Gauss ± 10% | | | |
| 12 | Total Flux | Max well min | | | |
| 13 | Magnet | Size | 9.5 x 1.5 mm | gr | oz |
| 14 | Total Weight | | | | gr oz |
| 15 | Load Test | After test meet item 9 and 10 | White noise | 0.3 W. | 24 Hours |
| 16 | Distortion | % MAX | | Hz | W. |
| 17 | Heat Test | After test meet item 9 and 10 | 70±2 ±°C | 20-50 %R.H. | 24 Hours |
| 18 | Humidity Test | After test meet item 9 and 10 | 40±2 ±°C | 90-95 %R.H. | 24 Hours |

| | | | |
|-----------|----------|----------|--------|
| PART NO. | GC0362MA | UNITS: | mm |
| DRAWN BY: | | PAGE NO: | 1 of 2 |

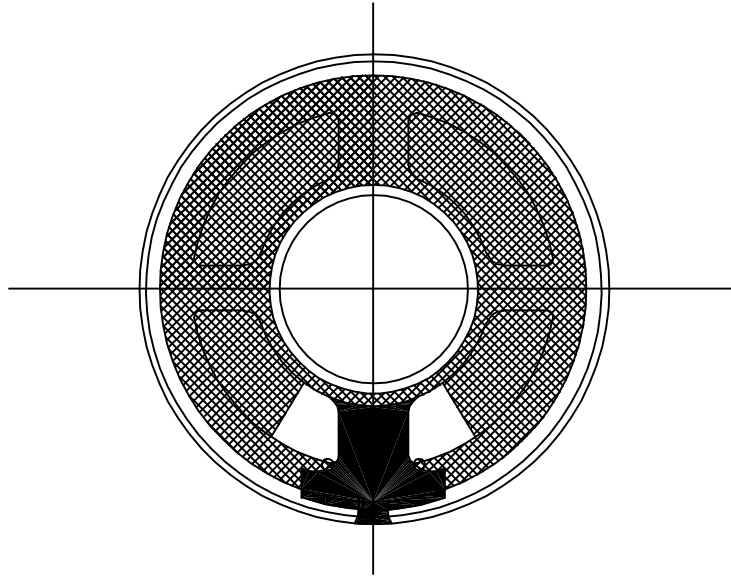

CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

PART NO.

GC0362MA

UNITS:

mm

DRAWN BY:

Page No.

2 of 2