



PART NUMBER: MEH12-PS

DESCRIPTION: sine wave encoder

ELECTRICAL SPECIFICATIONS

output waveform	A, B phase sine wave, Z phase square wave
output signals	A, B, Z phase
current consumption	≤40 mA
frequency response	0~50 KHz
output phase difference	A, B phase difference 90° ± 45° (T/4±T/8) Z phase T±T/2 (see output waveform)
supply voltage	5 V dc ± 10%
output resolution (ppr)	1000, 1500, 1800, 2000, 2500
waveform rise/fall time	2 μs or less (output cable 1 m or less)

MECHANICAL SPECIFICATIONS

max shaft load, radial:	0.98 N (100 gf)
axial:	0.98 N (100 gf)
starting torque	1 x 10 ⁻³ N·m (20 gf·cm)
max rotational speed	6000 RPM
shock resistance	500 m/s ² (50 G), 3 times each on XYZ
vibration proof	55 Hz, double amplitude 1.5mm, 2 hours each on XYZ
weight	40 g
cable	3 mm outside diameter, 5 core vinyl wire insulated shield cable (1m)

ENVIRONMENTAL SPECIFICATIONS

operating temp	0° ~ +50° C
storage temp	-20° ~ +80° C
humidity	RH 35%~90% non collecting

ORDERING INSTRUCTIONS

MEH12 - (X)XXXXPS


Bore options:
1.5 = 1.5 mm
2 = 2 mm
3 = 3 mm

Resolution (PPR):
1000 = 1000 PPR
1500 = 1500 PPR
2000 = 2000 PPR
2500 = 2500 PPR
1800 = 1800 PPR

PART NUMBER: MEH12-PS


DESCRIPTION: sine wave encoder

CIRCUIT CONNECTIONS

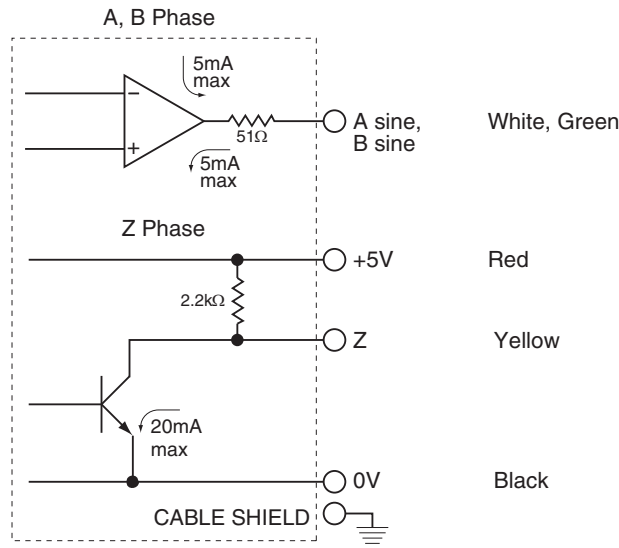

A capacitor (0.1 μF) is connected between 0 V and FG (frame ground).

OUTPUT WAVEFORM

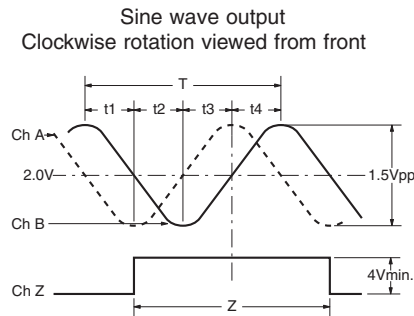

$$T = 360^\circ / \text{divisions} \quad t1, t2, t3, t4 = \frac{T}{4} \pm \frac{T}{8}$$



$$Z = T \pm 0.50T$$

$$M = M \times 20\% \text{ or less}$$

- Amplitude variation rate
- Amplitude waviness
- A/B Phase amplitude ratio

The position of Z phase against A, B phase is not specified

REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/27/2007

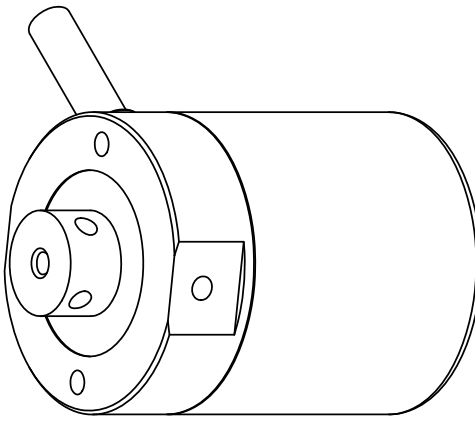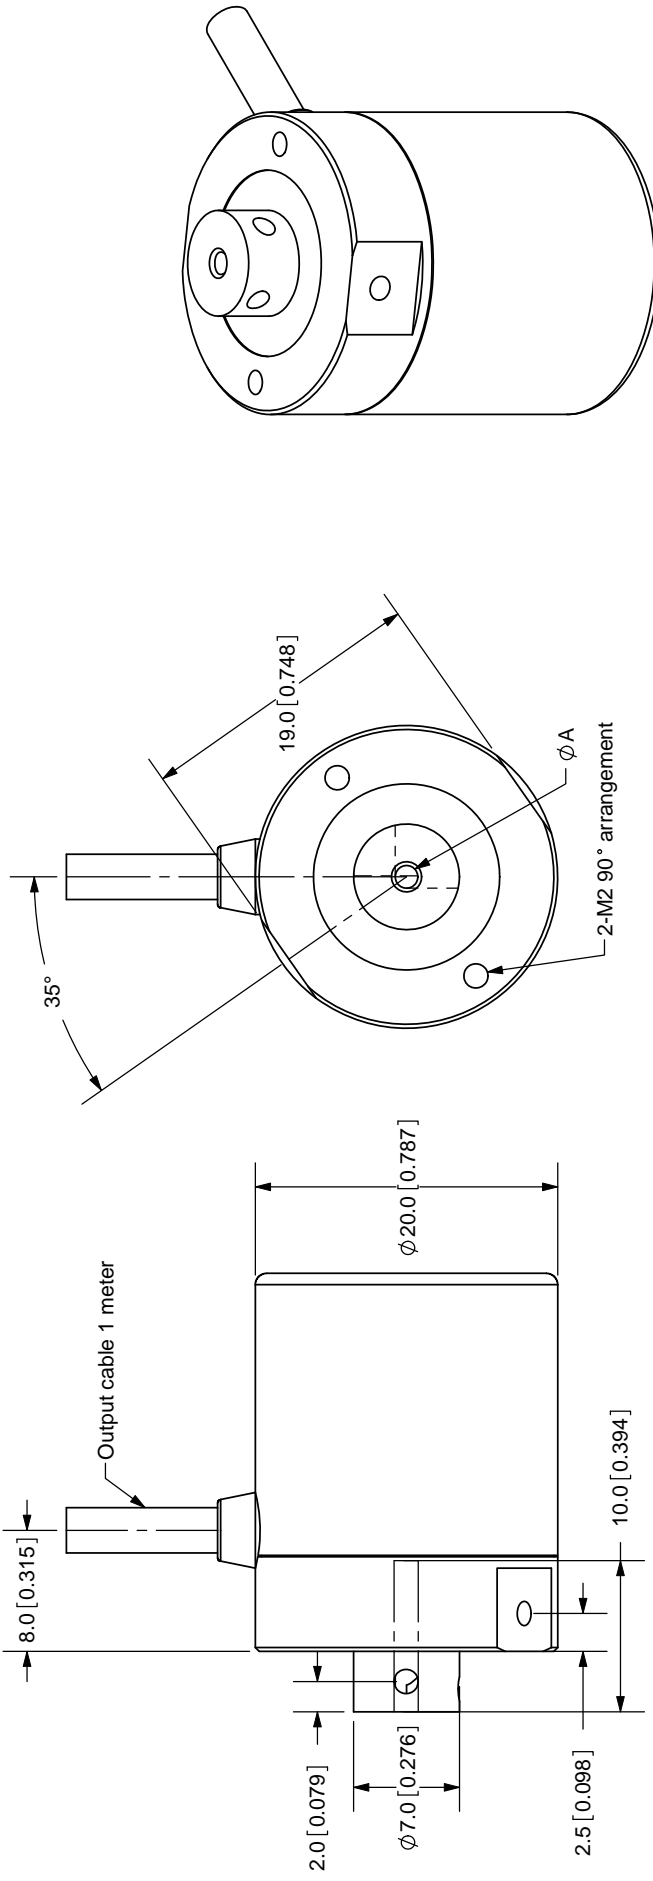


TOLERANCE:
±0.3mm UNLESS OTHERWISE
SPECIFIED



20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE:	Incremental Encoder	REV:	A
PART NO.:	MEH12-PS	UNITS:	MM [INCHES]
DRAWN BY:	JMS	APPROVED BY:	
		SCALE:	2:1

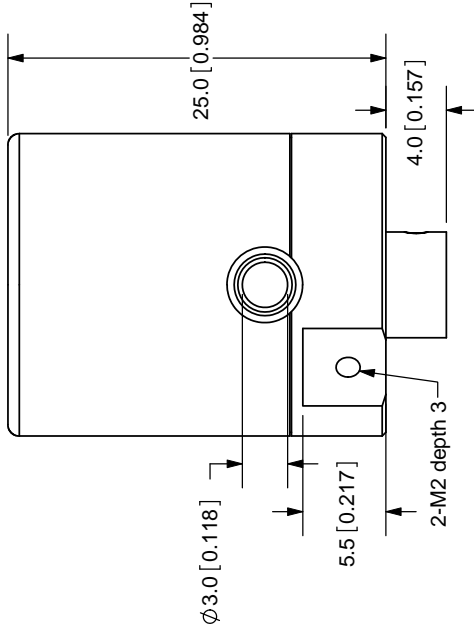

Hole ϕ A	
$\phi 1.5$	$\phi 2.0$
$\phi 3.0$	$\phi 3.0$

Cable Color	Red	White	Green	Yellow	Black
Output Type	Power	A-Phase	B-Phase	Z-Phase	0V

COPYRIGHT 2007
BY CUI INC.

PC FILE NAME:
MEH12-PS