

**SERIES:** PGNP1-S | **DESCRIPTION:** DC-DC CONVERTER**FEATURES**


- 6,000 Vdc isolation
- unregulated single/dual outputs
- certified to EN/UL 60601-1 (2x MOPP)
- designed to meet EN 62368-1
- leakage current less than 2  $\mu$ A
- -40 °C ~ 105 °C operating temperature
- continuous output short circuit protection
- reinforced insulation



MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple & noise <sup>1</sup> max (mVp-p)	efficiency <sup>2</sup> typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
PGNP1-S12-S3-S	12	10.8~13.2	3.3	31	303	1	150	76
PGNP1-S12-S5-S	12	10.8~13.2	5	20	200	1	120	79
PGNP1-S12-S9-S	12	10.8~13.2	9	12	111	1	120	81
PGNP1-S12-S12-S	12	10.8~13.2	12	9	84	1	120	83
PGNP1-S12-S15-S	12	10.8~13.2	15	7	67	1	120	83
PGNP1-S12-S24-S	12	10.8~13.2	24	4	42	1	120	82
PGNP1-S12-D5-S	12	10.8~13.2	±5	±10	±100	1	120	79
PGNP1-S12-D9-S	12	10.8~13.2	±9	±6	±56	1	120	79
PGNP1-S12-D12-S	12	10.8~13.2	±12	±5	±42	1	120	81
PGNP1-S12-D15-S	12	10.8~13.2	±15	±4	±34	1	120	81
PGNP1-S15-D5-S	15	13.5~16.5	±5	±10	±100	1	120	77
PGNP1-S15-D12-S	15	13.5~16.5	±12	±5	±42	1	120	79
PGNP1-S15-D15-S	15	13.5~16.5	±15	±4	±33	1	120	79
PGNP1-S24-S5-S	24	21.6~26.4	5	20	200	1	120	76
PGNP1-S24-S9-S	24	21.6~26.4	9	12	111	1	120	76
PGNP1-S24-S12-S	24	21.6~26.4	12	9	84	1	120	76
PGNP1-S24-S15-S	24	21.6~26.4	15	7	67	1	120	76
PGNP1-S24-S24-S	24	21.6~26.4	24	4	42	1	120	76
PGNP1-S24-D5-S	24	21.6~26.4	±5	±10	±100	1	120	75
PGNP1-S24-D9-S	24	21.6~26.4	±9	±6	±56	1	120	75
PGNP1-S24-D12-S	24	21.6~26.4	±12	±5	±42	1	120	76
PGNP1-S24-D15-S	24	21.6~26.4	±15	±4	±34	1	120	76

Notes: 1. Measured at nominal input, 20 MHz bandwidth oscilloscope.  
 2. Measured at full load.  
 3. All specifications are measured at Ta=25°C, humidity < 75%, nominal input voltage, and rated output load unless otherwise specified.

## PART NUMBER KEY

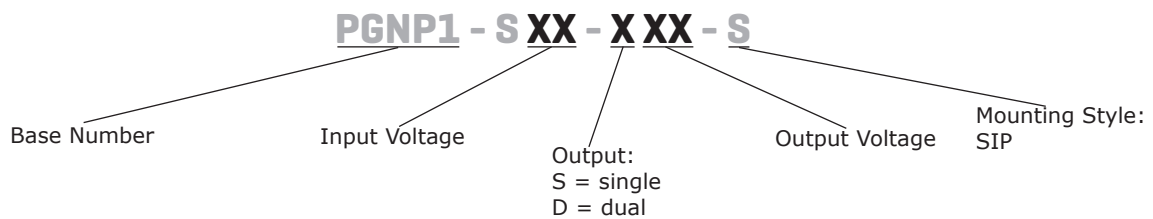

## INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage (full load/ no load)	12 Vdc input models		106/10	116/-	mA
	15 Vdc input models		90/10	100/-	mA
	24 Vdc input models		56/12	59/-	mA
surge voltage	for maximum of 1 second				
	12 Vdc input models	-0.7		18	Vdc
	15 Vdc input models	-0.7		21	Vdc
	24 Vdc input models	-0.7		30	Vdc
reflected ripple current <sup>4</sup>			200		mA
filter	filter capacitor				

Note: 4. Refer to DC-DC Converter Application notes for detailed description of reflected ripple current test

## OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load <sup>5</sup>	3.3, 5 Vdc output models			2,200	μF
	9 Vdc output models			680	μF
	±9, 12, 15 Vdc output models			470	μF
	24, ±12, ±15 Vdc output models			220	μF
	±5 Vdc output models			1,000	μF
voltage accuracy	see tolerance envelope curves				
line regulation	for Vin change of 1%				
	3.3 Vdc output models			1.5	%
	all other models			1.2	%
load regulation	from 10% to full load				
	3.3 & 5 Vdc output models			20	%
	all other models			15	%
switching frequency	at nominal input, full load		200		kHz
temperature coefficient	at full load		±0.02		%/°C

Note: 5. The capacitive loads of positive and negative outputs are identical.

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous, auto recovery				

## SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute at 1 mA	5,000			Vac
		6,000			Vdc
isolation resistance	input to output at 500 Vdc	1,000			MΩ
leakage current <sup>6</sup>	at 230 Vac, 50/60 Hz			2	μA
isolation capacitance	input to output, 100 kHz / 0.1 V		4		pF
safety approvals	certified to 60601-1: EN, UL designed to meet 62368-1: EN/BS EN				

## SAFETY AND COMPLIANCE (CONTINUED)

parameter	conditions/description	min	typ	max	units
conducted emissions	CISPR32/EN55032 CLASS B (see Fig. 4. for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 4. for recommended circuit)				
radiated emissions	CISPR32/EN55032 CLASS B (see Fig. 4. for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 4. for recommended circuit)				
ESD	EN60601-1-2 (IEC/EN61000-4-2) Air ±15kV, Contact ±8kV, perf. Criteria B				
MTBF	as per MIL-HDBK-217F, 25°C	19,360,000			hours
creepage & clearance distance		8			mm
RoHS	yes				

Note: 6. Leakage current and reinforced insulation is based on 250 VAC, 50/60 Hz system input voltag

## ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-40		105	°C
storage temperature		-55		125	°C
storage humidity	non-condensing	5		95	%
case temperature rise			25		°C

## SOLDERABILITY


parameter	conditions/description	min	typ	max	units
pin soldering temperature	1.5 mm from case for 10 seconds			300	°C

## DERATING CURVES

**OUTPUT REGULATION CURVE**  
**3.3 Vdc output model**  
**(nominal input)**

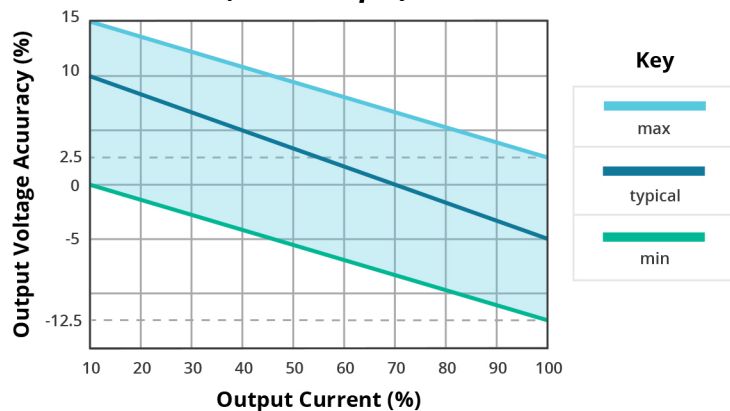


**OUTPUT REGULATION CURVE**  
**5 Vdc output model**  
**(nominal input)**

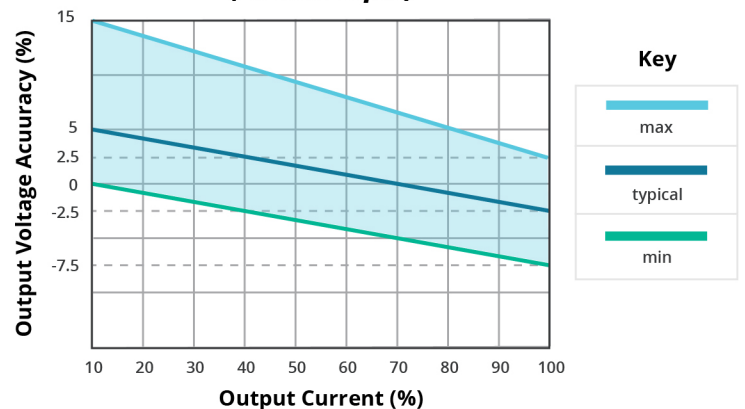


## DERATING CURVES (CONTINUED)

**OUTPUT REGULATION CURVE**  
3.3 Vdc output model  
(nominal input)

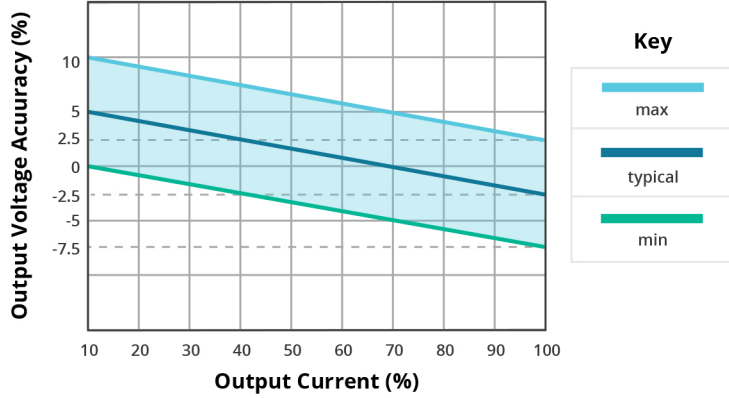

**TEMPERATURE DERATING CURVE**

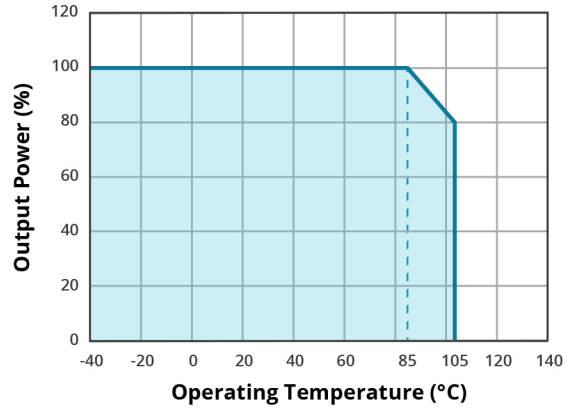



## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	19.50 x 9.80 x 12.50 [0.768 x 0.386 x 0.492 inch]				mm
case material	black flame-retardant and heat-resistant plastic (UL94V-0)				
weight			4		g

## MECHANICAL DRAWING

units: mm [inch]  
tolerance: ±0.50[±0.020]  
pin section tolerance: ±0.10[±0.004]


PIN CONNECTIONS		
PIN	Function	
	Single	Dual
1	Vin	Vin
2	GND	GND
7	0V	-Vout
8	No Pin	0V
9	+Vout	+Vout

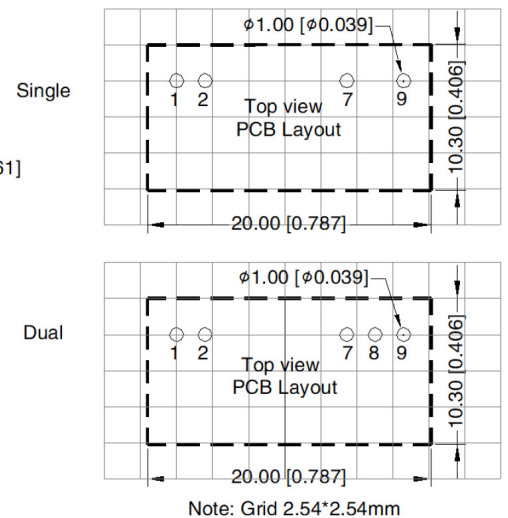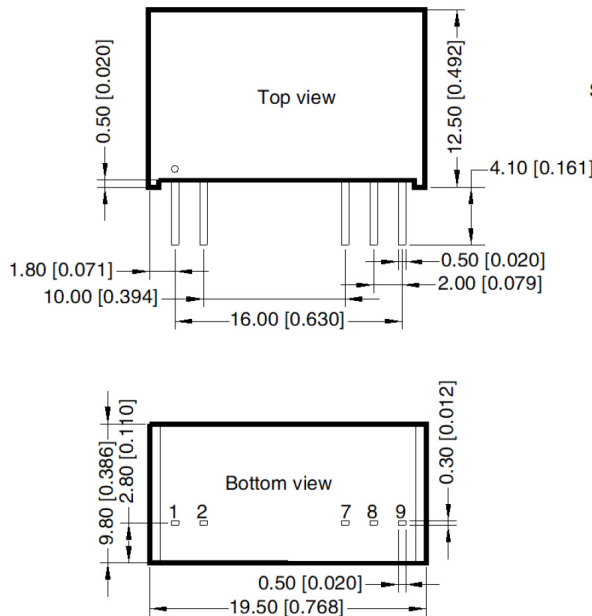

## APPLICATION CIRCUIT

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig. 1 & 2. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Tables 1 & 2.


**Figure 1**  
Single Output Models

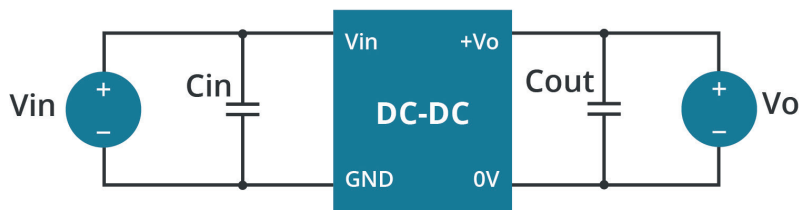

**Table 1**

Vin (Vdc)	Cin (μF/V)	Vo (Vdc)	Cout (μF/V)
12	10μF/25V	3.3, 5	10μF/16V
15	1μF/25V	9	10μF/16V
24	2.2μF/50V	12	2.2μF/25V
-	-	15	1μF/25V
-	-	24	0.47μF/50V

**Figure 2**  
Dual Output Models

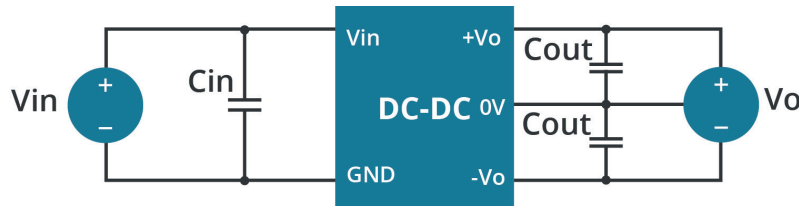


**Table 2**

Vin (Vdc)	Cin (μF/V)	Vo (Vdc)	Cout (μF/V)
12	10μF/25V	±5, ±9	4.7μF/16V
15	1μF/25V	±5, ±9	4.7μF/16V
24	2.2μF/50V	±12, ±15	1μF/25V

## EMC CLASS B RECOMMENDED CIRCUIT

### 12 V INPUT MODELS

**Figure 3**

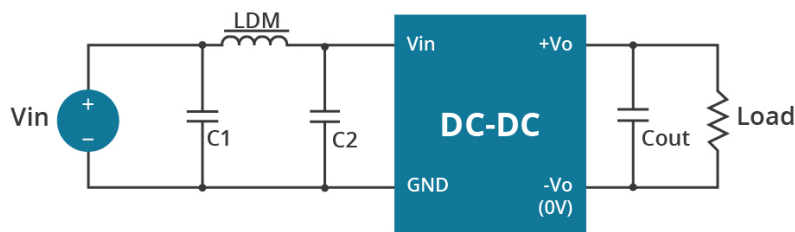

**Table 3**

Recommended External Circuit Components	
Vin	12 V
C1/C2	4.7 μF / 25 V
Cout	refer to Cout in Tables 1, 2
LDM	22 μH

## EMC CLASS B RECOMMENDED CIRCUIT (CONTINUED)

### 24 V INPUT MODELS

Figure 4

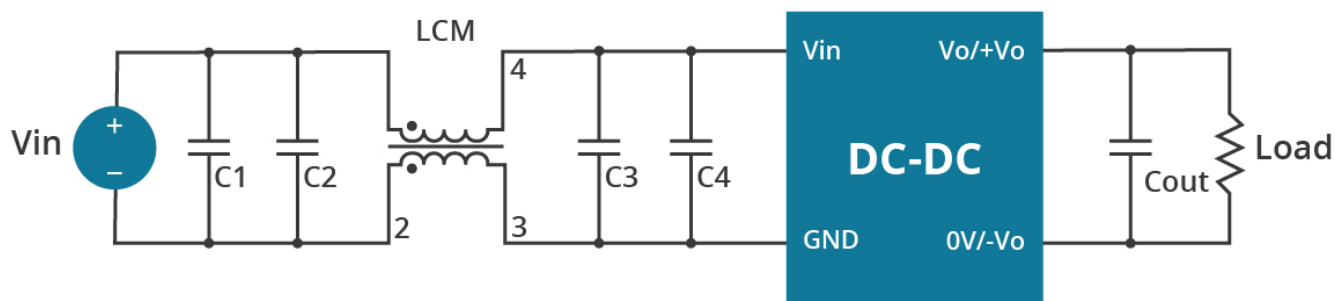


Table 4

Recommended External Circuit Components		
Vin	24 V	
C1/C2	4.7 $\mu$ F / 50 V	
C3	dual 24V outputs	100 $\mu$ F / 50 V
	all other outputs	4.7 $\mu$ F / 50 V
C4	dual 24V outputs	--
	all other outputs	4.7 $\mu$ F / 50 V
Cout	refer to Cout in Tables 1, 2	
LCM	22 $\mu$ H	

### Minimum Output Load Requirement

For a reliable and efficient operation of the converter, the minimum load should never be less than 10% of the rated output load. If the total required output power is below 10%, a parallel bleeding resistor is required on the output, ensuring that the sum of the power consumption is always maintained at 10% minimum.

## REVISION HISTORY

---

rev.	description	date
1.0	initial release	08/08/2023
1.01	table 4 updated	09/26/2023

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**

a bel group

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.